


The maximum 'cable extension' or maximum total amount of cable in the 2Voice system is 800M.

For example -

- Entry panel 1 to control equipment = 100M
- Entry panel 2 to control equipment = 10M
- Entry panel 3 to control equipment = 10M
- Entry panel 4 to control equipment = 10M
- Entry panel 5 to control equipment = 20M
- Entry panel 6 to control equipment = 30M
- Entry panel 7 to control equipment = 40M
- Control equipment to the last 1083/55 distributor = 40M
- 1083/55 distributor to monitor = 10M (multiplied by eg 40 apartments) = 400M.
- 100M + 10M + 10M + 20M + 30M + 40M + 40M + 400M = 660M cable extension.

If you calculate the 'cable extension' to be over 800M, please contact Urmet Technical Support.

Note that cables for electric releases, proximity readers etc do not need to be included in the cable extension calculation.

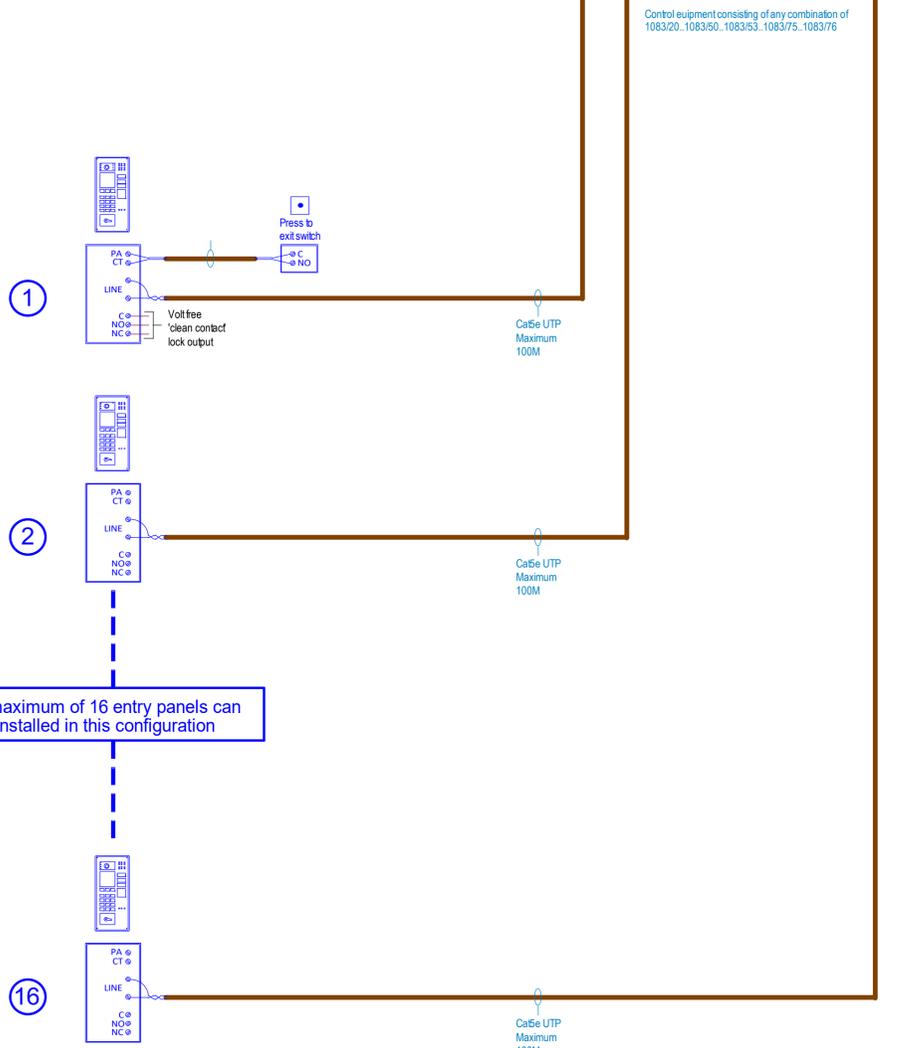


A maximum of 16 entry panels can be installed in this configuration

NOTES:

1. This schematic is for guidance only and should not be used for installation
2. Maximum distance from door entry panel to control equipment is 100m using Cat5e cable
3. Maximum distance from control equipment to the furthest monitor is 125m using Cat5e cable
4. Maximum distance from the 1083/55 to the monitor is 50m using Cat5e cable
5. Spare cores in Cat5e cable must not be used for other services -




6. Add a cable for the electric release or maglock -

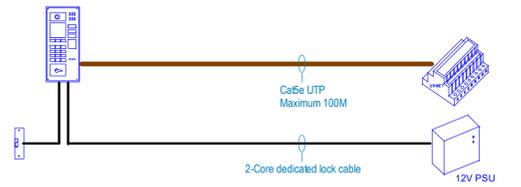


7. Add a second Cat5 cable if there is an Urmet/FDI iPassan access control system being fitted -



8. Cabling for double pole push to exit switch, double pole break glass unit and maglock -

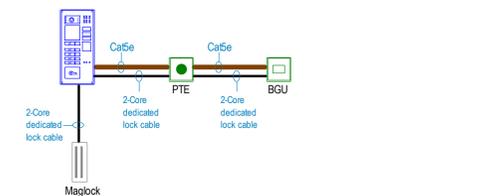

9. Up to four monitors can be connected to ring together -

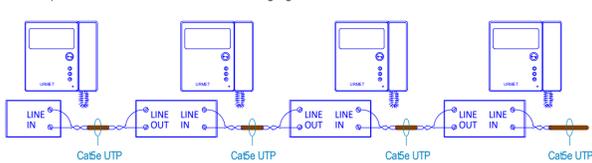

Urmet Communication & Security UK Ltd  
Urban Hive, Avenue West  
Skyline 120  
Great Nettle  
Essex  
CM77 7AA  
www.urmet.co.uk

Title 2Voice system schematic  
Drawing No. UD08325 PAGES  
Date 22-6-2022  
Drawn TC Checked LK Revision 01